
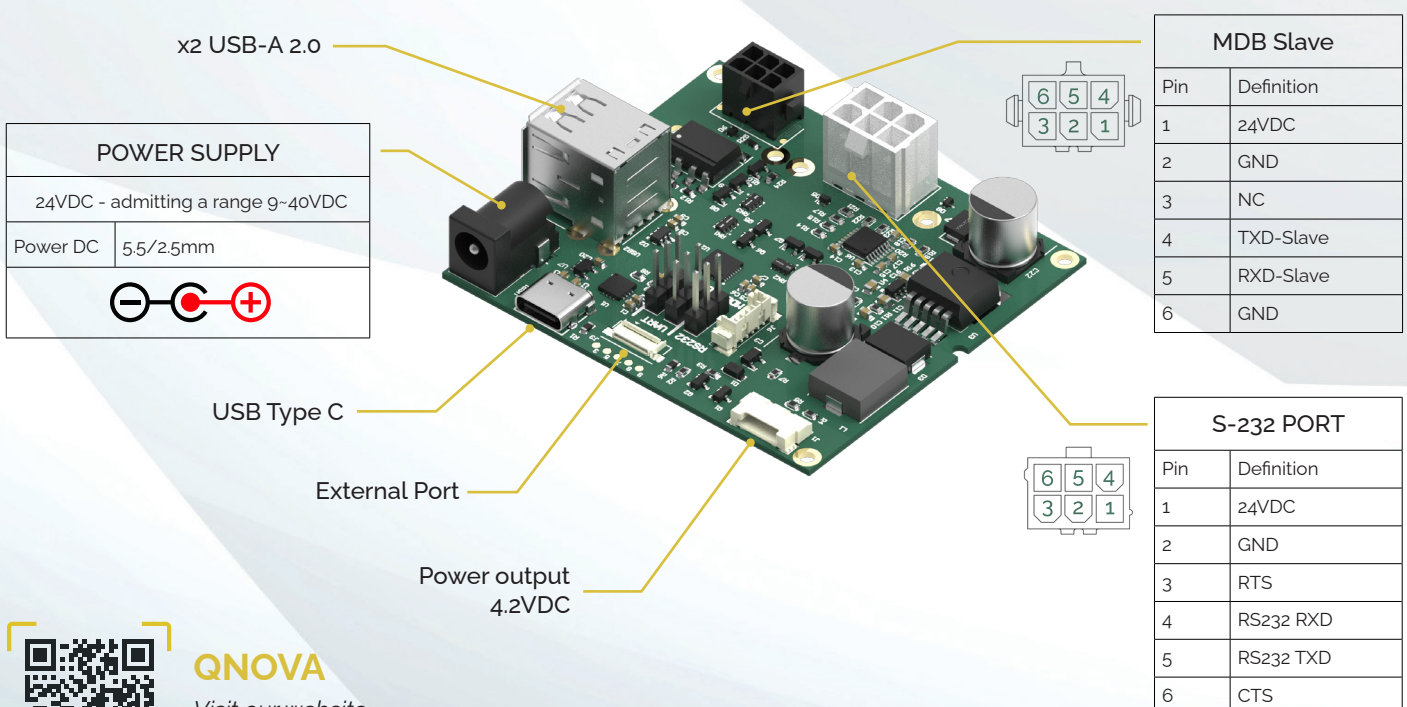


QNOVA MDB & RS232

Optimize the connectivity of your vending machine with our advanced MDB and RS-232 compatible communication board.

TECHNICAL SPECIFICATIONS

Dimensions	69x77x28 mm (2.7x3x1.1 inches)
Weight	79g
Outer Material	ABS/PC
USB	x2 USB-A 2.0 USB Type C
RS-232	Configurable RTS/CTS Configurable baud rate High baud rate
MDB Slave	Multilevel support. MDB level 3 Compatible "Always Idle" function Configurable selection timeout Configurable sale timeout "Pay First" operating mode
Output power	$V_{OUT} = 5V$, $P_{OUT} = 12.5W$
Charge	24VDC - admitting a range 9-40VDC

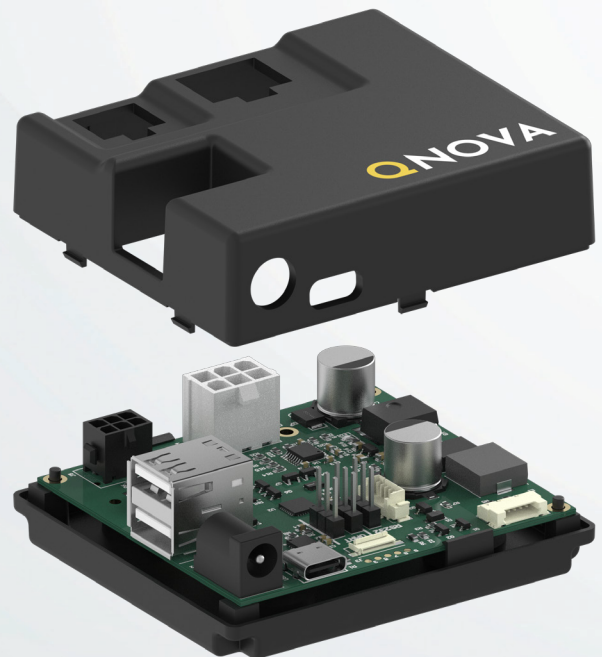

QNOVA

Visit our website
for more information